




- ▶ N.4 analog inputs, N.1 digital input, N.1 RS232 input Auto-recognition of connected sensors
- ▶ Input for serial sensors
- ▶ Extremely low power consumption and integrated batteries
- ▶ N.50 measurements considering channels for sensor acquisition and derived quantities
- ▶ Internal library for calculating derived quantities and mathematical calculations
- ▶ 8 MB Flash Memory
- ▶ Modbus-RTU Master/Slave, TTY protocols
- ▶ N.2 RS232 ports
- ▶ Sensors acquisition rate from 1 second to 12 hours Statistic elaboration rate from 1 second to 12 hours
- ▶ Connection to the PC via RS232 (USB /Ethernet with external accessories)
- ▶ Display and keyboard

M-Log is a compact data logger for environmental monitoring, suitable for portable indoor applications. Small and flexible, but also powerful and reliable, M-Log can be used in a virtually unlimited range of applications.



- ▶ Typically, M-Log (ELO009) is used on a portable tripod for Thermal Environments measurements for the assessment of thermal comfort and stress, air quality, ventilation measurements, thermo-hygrometric measurements for assessing the energy efficiency of buildings and HVAC tests

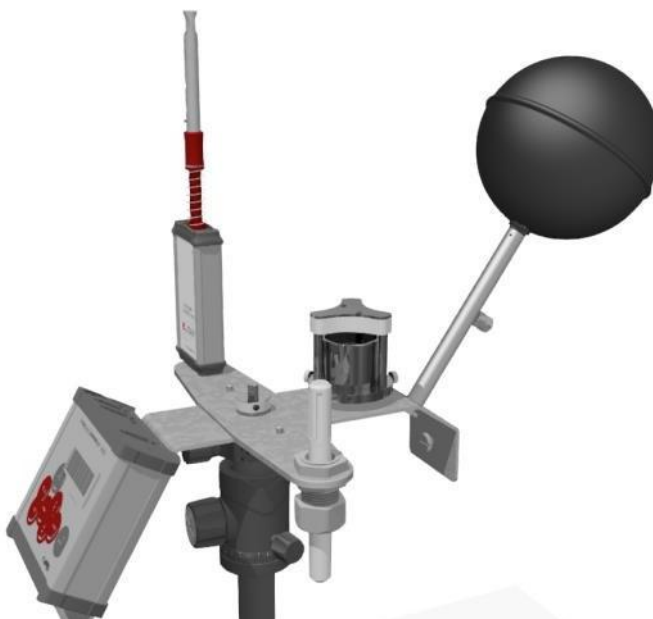

▶ **Inputs for analog and digital sensors**

Mini-DIN input connectors (ELO009)

- N.4 differential analogue inputs
- N.1 impulsive/frequency input

This model can auto-recognize the connected LSI LASTEM sensors.



▶ **Inputs for Serial sensors**



The M-Log COM-2 port can be connected to hot wire anemometers (ESV306-307) or to sensors with Modbus-RTU protocol output.

▶ **Measurements**

M-Log units can be connected to a wide range of sensors for environmental quantities, such as:

- Air temperature and Relative Humidity
- Black globe temperature
- Wet temperature
- Surface and materials temperatures
- Air speed
- Light
- Pollutants (indoor air quality)
- Thermal flow and Radiant asymmetry

LSI LASTEM supplies a wide range of compatible sensors, read the LSI LASTEM's catalogues.



▶ **Sensors acquisition rate**

Acquisition rate is programmable individually for each sensor (from 1 second to 12 hours). M-Log manages 4 channels from analog inputs and 8 derived quantities in 1 second. To limit energy consumption from sensors requiring power supply, it is possible to set an advanced power supply from the acquisition event (warm-up) that is interrupted immediately after the acquisition itself.

▶ **Data elaboration**

The raw measured values can be stored directly as instantaneous values, or be stored as statistical processing (n.1 base, from 1 second to 12 hours):

- Average/Minimum/Maximum/Standard Deviation
- Wind elaborations
- Totals

▶ **Derived and calculated quantities**

Internal library of derived environmental quantities. These calculations use acquired quantities, constant values and other calculated quantities. The library also includes mathematical functions (see Derived Quantities table). M-Log manages up to 50 channels between acquired, derived and calculated quantities.

▶ **Data memory**

Internal memory (8 MB) allows to store data typically for several weeks. The registration structure is circular. In the model (ELO009) with Mini-DIN inputs the data is stored in "surveys" with progressive numbering and date/time start/end.

▶ **Data communication (devices)**

It is possible to transfer data to a PC via RS232, USB (with adapter included), or via Ethernet through an external converter (see Accessories).

▶ **Data communication protocols**

M-Log uses a proprietary binary type of protocol to transmit data using LSI LASTEM communication programs: 3DOM and CommNET.

▶ **Built-in Temperature sensor**

Built-in Temperature sensor (accuracy 0.5 °C).

▶ **Peripherals**

M-Log is equipped with the following peripherals:

- N.1 RS232 DCE port
- N.1 RS232 DCE-DTE port

▶ **Data Logger configuration**

The configuration is carried out by means of the 3DOM program on PC. The configuration file is sent to the instrument via RS232, USB, RS485 or Ethernet with external optional devices.

▶ **Display**

M-Log is equipped with a back-lit LCD display (4x20 chrs) (see Models). The following information is listed:

- Real-time measurements list
- Diagnostic

▶ **Clock synchronization**

The internal clock (accuracy 1 min/month) is updated through the keyboard or through the 3DOM configuration program.

▶ **Power supply**


M-Log runs at 8...14 V DC and can charge, through battery charger (BSC015) the internal rechargeable lithium battery (see Models).

▶ **Power consumption and battery duration**

M-Log has a very low power consumption (standby < 4 mW), 140 mW during measurements. It allows a battery duration (using internal Lithium battery) of 3 months using sensors without own power consumption starting from fully charged battery.


M-Log comes with an internal (2 Ah, 4.2 V) Lithium rechargeable battery. For long-term operation, additional batteries are normally included in ELF enclosures (see Accessories).

Software

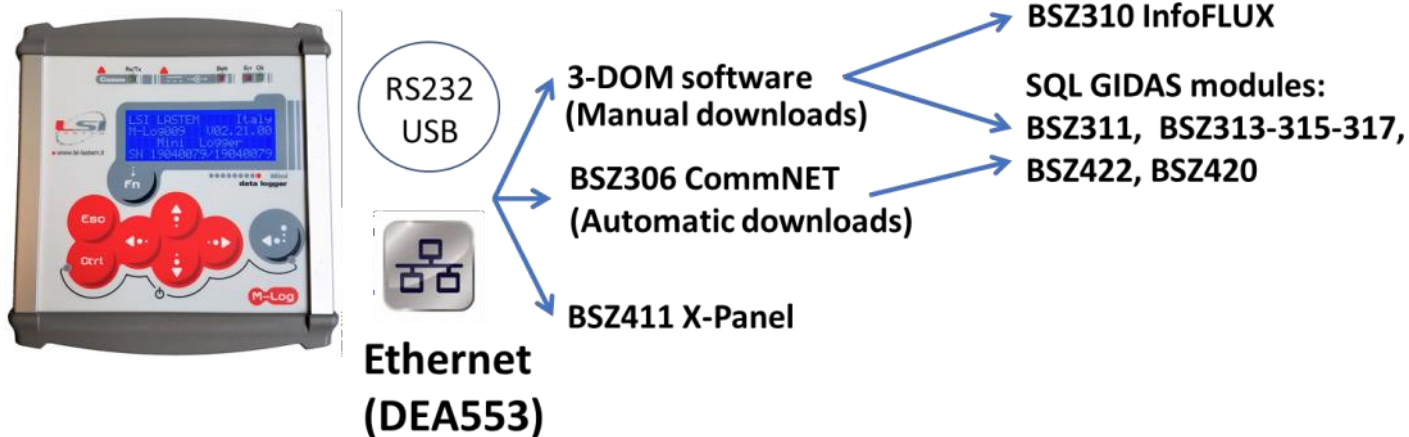

The data acquired by M-Log are downloaded to a PC using the 3DOM program in manual mode. 3DOM saves the data in TXT text format, or in SQL-Gidas format. From the latter, they can be managed with all the LSI-LASTEM applications that use this type of database (see Software catalog). Through the X-Panel program it is possible to view the data in dynamic form in real-time.

M-Log model

PN	ELO009
	
Description	M-Log data logger. N.5 inputs by Mini-DIN connector
Inputs type	Mini-Din
Analog inputs	N.4 differential
Digital inputs	N.1 (on/off or frequency/counter)
Sensors auto-recognition	YES
Switched power supply outputs	NO
Back-lit display	YES
Threaded slot for tripod fixing	YES
Internal battery	YES 2Ah rechargeable (4.2 V). Lithium
Plug for power battery charger	YES
Included accessories	RS232/USB adapter, RS232 cable, 3DOM program

Technical Features

Analog inputs		Range	Resolution	Accuracy (@ 25°C)
Volt		-300...1200 mV	40 µV	±100 µV
		±78 mV	3 µV	±35 µV
		±39 mV	1.5 µV	±25 µV
Pt100		-50...125 °C	0.003 °C	±0.05 °C
		-50...600 °C	0.013 °C	±0.11°C
Resistances		80...140 Ω	0.0013 Ω	±0.02 Ω
		80...320 Ω	0.005 Ω	±0.05 Ω
		0...6000 Ω	0.19 Ω	±1.5 Ω
Thermo-couples		E-IPTS 68 -200...1000 °C	< 0.1 °C	±1.5 °C
		J-IPTS 68 -50...600 °C	< 0.1 °C	±1.2 °C
		J – DIN -50...600 °C	< 0.1 °C	±1.2 °C
		K-IPTS 68 -150...1350 °C	< 0.1 °C	±1.9 °C
		S-IPTS 68 0...1600 °C	0.22 °C	±4.9 °C
		T-IPTS 68 -200...200 °C	<0.1 °C	±1.4 °C
Inputs number	N.4 differential			
ESD protection	±8 kV contact discharge IEC 1000–4-2 ±1.2 kV air-gap discharge IEC 1000–4-2			
Channel to Channel crosstalk	-93 dB			
Max input signal	3 V			
EMC filter	EN61326-1 2013			
Temperature error (@ -10...30 °C)	300...1200 mV < ±0.01% FS; ±39 mV < ±0.01% FS ±78 mV < ±0,01% FS			
Digital inputs	Inputs number	N.1		
	Mode	<ul style="list-style-type: none"> • Sensors with optoelectronics (freq. max 10 kHz) • Frequency input (freq. max 5 kHz) • Logic state input ON/OFF (they acquire signals 0 ... 3 V DC) 		
	Max input frequency	5 kHz		
	Accuracy	3 Hz @ 5 kHz		
	Protection	Transient voltage suppressor 600 W, <10 µs		

Switched power supply outputs	Outputs number	N.3 N.2 for sensors and external devices N.1 on pin9 RS232-1 port (communication devices)
	Max total current	On a single output: 0,7 A On all outputs: 1.2 A
	Protection	Thermal and over current (> 0.15 A)
Power supply	Power supply	8...14 V DC
	Power consumption (12 V)	During acquisition: 115 mW (136 mW display on) Stand-by: <4 mW
	Protection	Internal overcurrent, short-circuit Max actuator current, with external load: 1,5 A Transient voltage suppressor: 600 W, t >10 µs; Polarity inversion
Battery	Type	2 A (4,2 V) Lilon rechargeable
	Recharging time	About 8 h
RS232 ports	Speed	1200...115200 bps
	Type	DE-9 pin/male/female/DTE/DCE
Others	EMC	EN61326-1 2013
	Watch	Accuracy: 30 s/month (@ 25 °C)
	Display	LCD 4 x 20 char
	Keyboard	N. 8 keys
	Processor	2 RISC 8 bit, clock 16 MHz
	A/D converter	18 bit resolution (rounded to 16 bit)
	Sample duration	(rejection 50/60 Hz): 80 ms @ rejection 50 Hz
	Data memory	8 Mb
	Environmental limits	-20...60 °C, 15...100 % RH (without condensation water)
	Protection grade	IP 40
	Weight	0.5 kg
	Dimensions	140 x 120 x 50 mm