

R&S® ESSENTIALS

R&S® UDS

# DIGITAL MULTIMETERS

Built for accuracy, designed for ease



Data Sheet  
Version 01.00

**ROHDE & SCHWARZ**

Make ideas real



# MEASUREMENT CAPABILITIES LIKE NEVER BEFORE

The R&S®UDS family of compact digital multimeters is engineered for both general-purpose and production line environments. Renowned for their versatility and precision, the multimeters can simultaneously display three measurement functions, streamlining test workflows. Beyond the standard 12 measurement functions, the multimeters offer built-in statistical and mathematical functions and an intuitive user interface for smooth and efficient testing.

Accuracy, speed and usability are vital to digital multimeters. The instruments are indispensable in circuit troubleshooting, component testing and system validation. The R&S®UDS family of digital multimeters are a powerful solution and include 5½ and 6½ digit multimeters, tailored for both laboratory and production testing. The large screen can display three values at the same time and be easily viewed from a distance.

Both models come fully equipped with essential measurement capabilities for all testing environments. Users can effortlessly navigate through DCV, DCI, ACV, ACI, frequency, resistance, temperature, capacitance, diode and continuity testing functions. Front panel sense sockets support four-wire measurements that require low/high connections. The basic functions are complemented by statistical measurement capabilities and limit testing features. Users can configure statistical parameters and set measurement limits. Display colors change to indicate limit violations: red for out-of-limit values and green for within-limit ones. An optional error tone can be toggled with the beeper soft menu key.

Auto-ranging eliminates the need for manual adjustments while improving efficiency and reducing tact times. Instrument settings can be conveniently stored and retrieved with the save and recall function.

The R&S®UDS600 digital multimeter has exceptional DC accuracy with 0.0075% precision. Such high levels of accuracy and 6½ digit resolution mean that even the most minute variations can be precisely captured.

All instruments in the R&S®UDS family can be remotely controlled via Ethernet or USB. A virtual COM port and the USB test and measurement class (TMC) are supported. Remote control commands comply with SCPI standards and cost-free driver packages for LabVIEW, LabWindows/CVI and IVI.net are available. The packages enable seamless integration of R&S®UDS instruments into existing systems. The R&S®UDS500-G and R&S®UDS600-G models fit effortlessly into the R&S®HZC95 2 HU 19" rackmount kit, making them ideal for production environments.

## Key facts

- ▶ Measurement range: DC to 100 kHz
- ▶ Digit resolution: up to 6½ digits
- ▶ Basic DC accuracy: 0.0075%
- ▶ Up to 200 readings/s
- ▶ Measurement functions: basic, mathematical
- ▶ Resolution: 100 nV, 10 nA, 0.1 mΩ, 0.1 pF, 1 Hz, 0.1 °C

# BENEFITS

## FOUR MODEL SERIES

- ▶ R&S®UDS500: 5½ digital multimeter
- ▶ R&S®UDS500-G: 5½ digital multimeter with GPIB interface
- ▶ R&S®UDS600: 6½ digital multimeter
- ▶ R&S®UDS600-G: 6½ digital multimeter with GPIB interface

## MEASUREMENT ACCURACY

- ▶ Up to 2 000 000 counts
- ▶ Basic DC accuracy: 0.0075 %
- ▶ Signal acquisition from DC to 100 kHz, with up to 200 measurements/s
- ▶ Resolution: 100 nV, 10 nA, 0.1 mΩ, 0.1 pF, 1 Hz, 0.1 °C

## MEASUREMENT VERSATILITY

- ▶ Simultaneous display of three measurements, e.g. DC, AC and statistics
- ▶ Up to 12 measurement functions: DCV, DCI, true RMS, ACV and ACI, frequency, two-wire and four-wire resistance, capacitance, continuity test, diode test, temperature, power
- ▶ Versatile mathematic functions: limit testing, min./max., average, offset, DC power, dB, dBm
- ▶ Brilliant QVGA color display for excellent readability
- ▶ Limit testing directly on the display for easy minimum/maximum analysis
- ▶ Long-term data logging in CSV format via USB flash drive

## REMOTE CONTROL

- ▶ USB port (virtual COM port, USBTMC)
- ▶ Ethernet interface (LAN) with integrated web server
- ▶ Remote control via SCPI based commands
- ▶ Driver packages for LabVIEW, LabWindows/CVI, IVI.net
- ▶ R&S®UDSx-G models: also IEEE-488 (GPIB) interface
- ▶ Code compatible with R&S®HMC8012

## INCLUDED ACCESSORIES

- ▶ 1-m silicon test leads with safety connector and test probe
- ▶ Set of power cables
- ▶ Quick start guide

# VERSATILE FUNCTIONS


## Manual and auto ranging

The range up or range down soft menu keys can adjust the measuring range. Range down switches to the next lower range, while range up switches to the next higher range. When auto range is deactivated, manual adjustments are necessary. When auto range is activated, the device automatically selects the optimal measurement range. If the measured value exceeds the selected range in manual mode, an “over range” message will appear.


## Two- and four-wire measurements

The R&S®UDS digital multimeters support both two-wire and four-wire measurements. They feature four front panel sockets: Com, V, Lo and Hi. For two-wire measurements, only the Com and V sockets are required. Four-wire measurements also require Lo and Hi sockets (Sense).

### Two-wire measurements

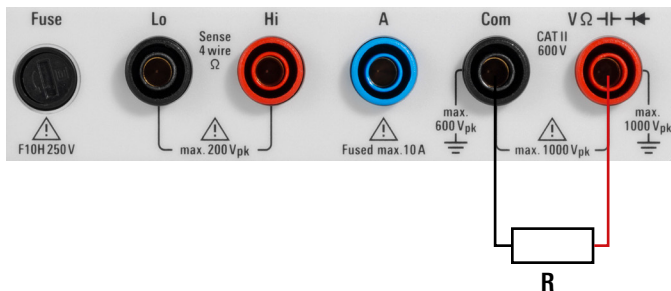

### Four-wire measurements

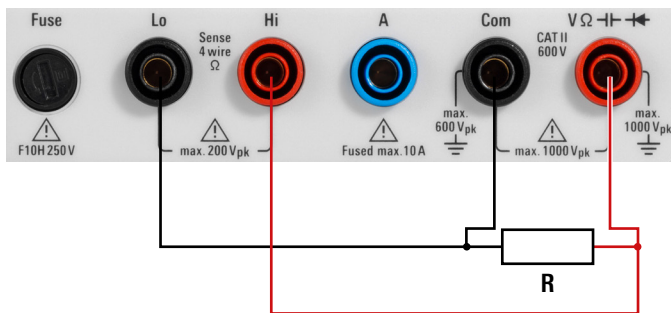


## Multiple value function

Depending on the selected measurement function, users can display multiple measured values. The primary measurement value is main. A secondary measurement value can be activated or deactivated with the soft menu key. When activated, the secondary measurement value is displayed above the primary measurement value. If none is selected, the secondary value is deactivated. When clipping occurs in one of the functions, values for both functions are invalid.<sup>1)</sup>

## Built-in statistics


In addition to the basic functions, R&S®UDS multimeters offer mathematical functions. The integrated statistics in the R&S®UDS show min./max., mean, standard deviation, peak-to-peak and count. These can be activated with the stats soft menu. Statistical values can be toggled on/off with the stats soft menu button. The statistical functions are displayed below the primary measurement value.

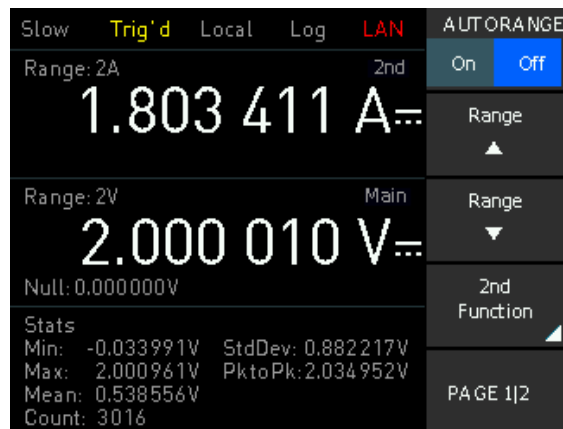

<sup>1)</sup> Recommended range selection for ACV/DCV dual function use: range AC < range DC.

## Limit testing

The limit testing feature on the color display is ideal for conducting minimum and maximum analysis. The R&S®UDS digital multimeters have programmable test functions, including max./min. limits on/off. The display color changes to indicate limit violations: red for out-of-limit values and green for within-limit values. An error tone can be toggled on/off with the beeper soft menu key and sounds when limits are violated.

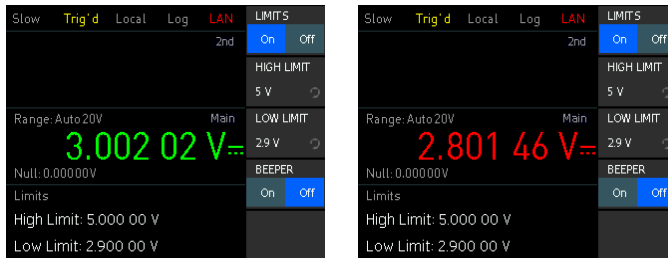


## Save and recall functions

The save and recall functions make it easy store and retrieve frequently used settings. Instrument settings can be freely stored and accessed via the save/recall button. To save current settings, select the save submenu, choose the storage space and name the file. The settings can be reloaded later with the recall submenu.


## Data logging

The R&S®UDS digital multimeters have a data logging function that records all measured values. The data can be saved on an external USB flash drive or transferred to an external PC with a USB or LAN connection. The data rate of up to 10 sample/s means the measured values are available every 100 ms.

Front view of the R&S®UDS500

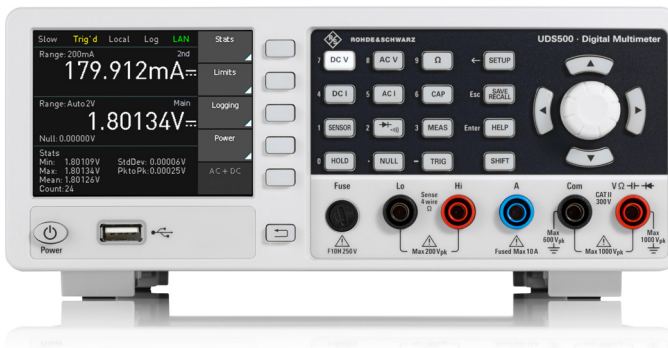

Front view of the R&S®UDS600

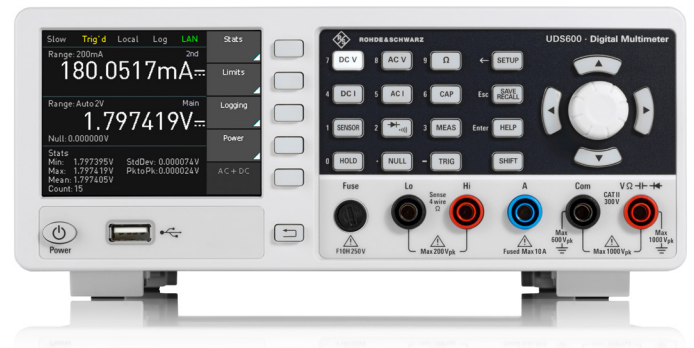

Rear view of the R&S®UDS without GPIB



Rear view of the R&S®UDS with GPIB





# IDEAL FOR LABS AND TEST SYSTEMS

## Tailored for labs and production test systems

R&S®UDS digital multimeters were developed for challenging applications. The multimeters are used in R&D labs and integrated into production test systems.

The instruments can be installed on 19" racks with the R&S®HZC95 rack adapter. The compact design lets two instruments be installed next to each other.

## Full remote capabilities

All R&S®UDS instruments can be remotely controlled for use in test systems. Standard commands for programmable instruments (SCPI) are used. The following interfaces are available:

- ▶ USB and LAN (Ethernet) interfaces as standard
- ▶ IEEE-488 (GPIB) interface: R&S®UDS500-G and R&S®UDS600-G models with additionally IEEE-488 (GPIB) interface

**Note: This interface cannot be retrofitted to the standard models.**



## Modern architecture: small, compact and quiet

Benches or racks are always crowded. R&S®UDS measuring instruments take up very little space regardless of their digital resolution. The temperature-controlled fan helps keep the workplace quiet.



# SPECIFICATIONS

## Definitions


### General

Product data applies under the following conditions:

- ▶ Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- ▶ Specified environmental conditions
- ▶ Recommended calibration interval
- ▶ All internal automatic adjustments performed, if applicable

### Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$  or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

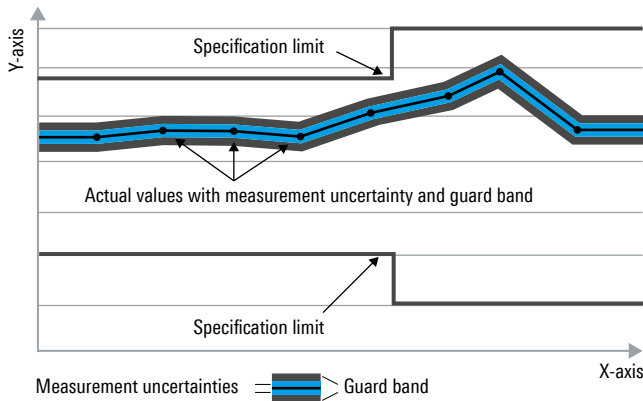

### Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

### Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

### Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

### Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

### Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

### Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msamples/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msamples/s are not SI units.

| Basic specifications   |   |                    |
|------------------------|---|--------------------|
|                        | R&S®UDS500  | R&S®UDS600         |
| Number of digits       | 5½  | 6½                 |
| Measurement functions  | DCV, DCI, true RMS, ACV and ACI, frequency, resistance (two-wire and four-wire), capacitance, continuity test, diode test, temperature, power |                    |
| Mathematical functions | limit testing, minimum, maximum, average, offset, DC power, calculation of dB and dBm   |                    |
| Maximum reading rate   | 200 readings/s  |                    |
| DC basic accuracy      | 0.015% of reading   | 0.0075% of reading |
| Frequency              |   |                    |
| Measurement range      | DC to 100 kHz   |                    |
| Resolution             | slow speed, 1 s measurement time, resolution: 1 Hz  |                    |
|                        | medium speed, 100 ms measurement time, resolution: 10 Hz  |                    |
|                        | fast speed, 10 ms measurement time, resolution: 100 Hz  |                    |
| DC voltage (DCV)       |   |                    |
| Measurement range      | 200 mV to 1000 V  |                    |
| Resolution             | 1 µV  | 100 nV             |
| AC voltage (ACV)       |   |                    |
| Measurement range      | 200 mV to 750 V (RMS)   |                    |
| Resolution             | 1 µV  | 100 nV             |
| DC current (DCI)       |   |                    |
| Measurement range      | 20 mA to 10 A   |                    |
| Resolution             | 100 nA  | 10 nA              |
| AC current (ACI)       |   |                    |
| Measurement range      | 20 mA to 10 A   |                    |
| Resolution             | 100 nA  | 10 nA              |
| Resistance             |   |                    |
| Measurement range      | 200 Ω to 250 MΩ   |                    |
| Resolution             | 1 mΩ  | 0.1 mΩ             |
| Temperature            |   |                    |
| Sensor type            | measurement with platinum sensor PT100/PT500/PT1000   |                    |
| Resolution             | 0.1 °C  |                    |
| Capacitance            |   |                    |
| Measurement range      | 5 nF to 500 µF  |                    |
| Resolution             | 1 pF  | 0.1 pF             |
| Continuity test        | ●   |                    |
| Diode test voltage     | 2.4 V   |                    |

| DC specifications of the R&S®UDS500 (meas.) |                     |                             |                                |   |  |
|---|---------------------|-----------------------------|--------------------------------|---|--|
| Function                                    | Range <sup>1)</sup> | Test current (voltage drop) | Input impedance                | 1 year deviation <sup>2)</sup> (+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>2)</sup> (0 °C to +20 °C, +30 °C to +55 °C) |
| DC voltage                                  | 200 mV              |                             | 10 MΩ or > 10 GΩ <sup>3)</sup> | 0.015 + 0.002   | 0.0010 + 0.0005  |
|   | 2 V                 |                             | 10 MΩ or > 10 GΩ <sup>3)</sup> | 0.015 + 0.002   | 0.0008 + 0.0003  |
|   | 20 V                |                             | 10 MΩ                          | 0.020 + 0.002   | 0.0010 + 0.0005  |
|   | 200 V               |                             | 10 MΩ                          | 0.020 + 0.002   | 0.0015 + 0.0005  |
|   | 1000 V              |                             | 10 MΩ                          | 0.025 + 0.002   | 0.0015 + 0.0005  |
| Resistance (2/4-wire) <sup>4)</sup>         | 200 Ω               | 1 mA                        |                                | 0.050 + 0.005   | 0.0020 + 0.0005  |
|   | 2 kΩ                | 1 mA                        |                                | 0.015 + 0.002   | 0.0020 + 0.0002  |
|   | 20 kΩ               | 100 µA                      |                                | 0.015 + 0.002   | 0.0020 + 0.0002  |
|   | 200 kΩ              | 10 µA                       |                                | 0.030 + 0.003   | 0.0020 + 0.0002  |
|   | 2 MΩ                | 1 µA                        |                                | 0.060 + 0.005   | 0.0020 + 0.0002  |
|   | 20 MΩ               | 100 nA                      |                                | 0.250 + 0.003   | 0.0080 + 0.0005  |
|   | 250 MΩ              | 100 nA    10 MΩ (parallel)  |                                | 2.000 + 0.010   | 0.200 + 0.0005   |

<sup>1)</sup> 220 000 counts except in the 1000 V and 10 A range.

<sup>2)</sup> DC accuracy in ±(% reading + % range).

<sup>3)</sup> The impedance is dependent on the measurement range. For the 200 mV and 2 V range, the input impedance can be set to either 10 MΩ or > 10 GΩ (high impedance).

<sup>4)</sup> Specifications are for four-wire measurements; two-wire measurements use Null function.



### DC specifications of the R&S®UDS500 (meas.)

| Function                 | Range <sup>1)</sup> | Test current (voltage drop) | Input impedance | 1 year deviation <sup>2)</sup> (+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>2)</sup> (0 °C to +20 °C, +30 °C to +55 °C) |
|--------------------------|---------------------|-----------------------------|-----------------|---|--|
| DC current <sup>5)</sup> | 20 mA               | < 0.30 V                    |                 | 0.05 + 0.010  | 0.008 + 0.0010   |
|                          | 200 mA              | < 0.27 V                    |                 | 0.05 + 0.010  | 0.008 + 0.0010   |
|                          | 2 A                 | < 0.2 V                     |                 | 0.25 + 0.070  | 0.012 + 0.0015   |
|                          | 10 A <sup>6)</sup>  | < 0.60 V                    |                 | 0.25 + 0.070  | 0.010 + 0.0010   |
| Continuity test          | 2 kΩ                | 1 mA                        |                 | 0.05 + 0.010  | 0.005 + 0.0005   |
| Diode test               | 2.4 V               | 1 mA                        |                 | 0.05 + 0.010  | 0.005 + 0.0005   |

### DC specifications of the R&S®UDS600 (meas.)

| Function                            | Range <sup>1)</sup> | Test current (voltage drop) | Input impedance                | 1 year deviation <sup>2)</sup> (+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>2)</sup> (0 °C to +20 °C, +30 °C to +55 °C) |
|-------------------------------------|---------------------|-----------------------------|--------------------------------|---|--|
| DC voltage                          | 200 mV              |                             | 10 MΩ or > 10 GΩ <sup>3)</sup> | 0.0090 + 0.0065                                       | 0.0010 + 0.0005  |
|                                     | 2 V                 |                             | 10 MΩ or > 10 GΩ <sup>3)</sup> | 0.0080 + 0.0010                                       | 0.0008 + 0.0003  |
|                                     | 20 V                |                             | 10 MΩ                          | 0.0075 + 0.0005                                       | 0.0010 + 0.0005  |
|                                     | 200 V               |                             | 10 MΩ                          | 0.0085 + 0.0006                                       | 0.0015 + 0.0005  |
|                                     | 1000 V              |                             | 10 MΩ                          | 0.0085 + 0.0010                                       | 0.0015 + 0.0005  |
| Resistance (2/4-wire) <sup>4)</sup> | 200 Ω               | 1 mA                        |                                | 0.050 + 0.005   | 0.0020 + 0.0005  |
|                                     | 2 kΩ                | 1 mA                        |                                | 0.015 + 0.002   | 0.0020 + 0.0002  |
|                                     | 20 kΩ               | 100 μA                      |                                | 0.015 + 0.002   | 0.0020 + 0.0002  |
|                                     | 200 kΩ              | 10 μA                       |                                | 0.030 + 0.003   | 0.0020 + 0.0002  |
|                                     | 2 MΩ                | 1 μA                        |                                | 0.060 + 0.005   | 0.0020 + 0.0002  |
|                                     | 20 MΩ               | 100 nA                      |                                | 0.250 + 0.003   | 0.0080 + 0.0005  |
|                                     | 250 MΩ              | 100 nA    10 MΩ (parallel)  |                                | 2.000 + 0.010   | 0.200 + 0.0005   |
| DC current <sup>5)</sup>            | 20 mA               | < 0.30 V                    |                                | 0.050 + 0.0050  | 0.008 + 0.0010   |
|                                     | 200 mA              | < 0.27 V                    |                                | 0.050 + 0.0050  | 0.008 + 0.0010   |
|                                     | 2 A                 | < 0.2 V                     |                                | 0.100 + 0.0100  | 0.012 + 0.0015   |
|                                     | 10 A <sup>6)</sup>  | < 0.60 V                    |                                | 0.200 + 0.0200  | 0.010 + 0.0010   |
| Continuity test                     | 2 kΩ                | 1 mA                        |                                | 0.05 + 0.010  | 0.005 + 0.0005   |
| Diode test                          | 2.4 V               | 1 mA                        |                                | 0.05 + 0.010  | 0.005 + 0.0005   |

### AC specifications of the R&S®UDS500/UDS600 (meas.)

| Function                 | Range <sup>1)</sup> | Frequency                        | 1 year deviation <sup>7)</sup> (+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>7)</sup> (0 °C to +20 °C, +30 °C to +55 °C) |
|--------------------------|---------------------|----------------------------------|---|--|
| AC voltage <sup>2)</sup> | 200 mV              | 10 Hz to 20 Hz                   | 3.0 + 0.05  | 0.01 + 0.01  |
|                          | 2 V                 | 20 Hz to 45 Hz                   | 1.5 + 0.05  | 0.01 + 0.01  |
|                          | 20 V                | 45 Hz to 20 kHz                  | 0.3 + 0.05  | 0.01 + 0.01  |
|                          | 200 V               | 20 kHz to 50 kHz <sup>8)</sup>   | 1.0 + 0.05  | 0.02 + 0.01  |
|                          | 750 V <sup>9)</sup> | 50 kHz to 100 kHz <sup>10)</sup> | 3.0 + 0.05  | 0.05 + 0.01  |
| AC current <sup>5)</sup> | 20 mA               | 20 Hz to 40 Hz                   | 1.5 + 0.05  | 0.01 + 0.01  |
|                          | 200 mA              | 40 Hz to 1 kHz                   | 0.5 + 0.05  | 0.01 + 0.01  |
|                          | 2 A                 | 1 kHz to 5 kHz                   | 1.5 + 0.05  | 0.01 + 0.01  |
|                          | 10 A <sup>6)</sup>  | 5 kHz to 10 kHz <sup>11)</sup>   | 2.5 + 0.05  | 0.01 + 0.01  |

<sup>5)</sup> At 250 V maximum.

<sup>6)</sup> Maximum current load at > 5 A is 30 s, followed by a pause of > 30 s.

<sup>7)</sup> AC accuracy in ±(% reading + % range).

<sup>8)</sup> Tolerance only applies to values > 20% of respective range. For reading values ≤ 20%, tolerance range of 0.4% applies.

<sup>9)</sup> For ACV measurements and frequencies above 50 kHz, the user is required to choose an appropriate measurement range.

<sup>10)</sup> Tolerance only applies to values > 20% of respective range. For reading values ≤ 20%, tolerance range of 0.85% applies.

<sup>11)</sup> Except 10 A range.

## Frequency counter specifications of the R&S®UDS500/UDS600

| Function                  | Range <sup>12)</sup> | Frequency       | 1 year deviation <sup>13)</sup><br>(+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>11)</sup><br>(0 °C to +20 °C,<br>+30 °C to +55 °C) |
|---------------------------|----------------------|-----------------|---|---|
| AC voltage <sup>14)</sup> | all ranges           | 5 Hz to 700 kHz | 0.01  | 0.005   |
| AC current <sup>12)</sup> | 20 mA, 200 mA        | 5 Hz to 10 kHz  | 0.01  | 0.005   |
|                           | 2 A, 10 A            | 5 Hz to 5 kHz   | 0.01  | 0.005   |

## Frequency counter resolution of the R&S®UDS500/UDS600

| Setting | Measurement time | Display range | Resolution |
|---------|------------------|---------------|------------|
| Slow    | 1 s              | 999.999 kHz   | 1 Hz       |
| Medium  | 100 ms           | 999.99 kHz    | 10 Hz      |
| Fast    | 10 ms            | 999.9 kHz     | 100 Hz     |

## Capacitance specification (meas.)

| Function    | R&S®UDS500 |   |   | R&S®UDS600 |   |   |
|-------------|------------|---|---|------------|---|---|
|             | Range      | 1 year deviation <sup>15)</sup><br>(+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>13)</sup><br>(0 °C to +20 °C,<br>+30 °C to +55 °C) | Range      | 1 year deviation <sup>13)</sup><br>(+23 °C – 3 °C/+ 7 °C) | Temperature coefficient <sup>13)</sup><br>(0 °C to +20 °C,<br>+30 °C to +55 °C) |
| Capacitance | 5,000 nF   | 2.0 + 2.5   | 0.02 + 0.002  | 5,0000 nF  | 2.0 + 2.5   | 0.02 + 0.002  |
|             | 50,00 nF   | 1.0 + 2.0   | 0.02 + 0.002  | 50,000 nF  | 1.0 + 2.0   | 0.02 + 0.002  |
|             | 500,0 nF   | 1.0 + 0.5   | 0.02 + 0.002  | 500,00 nF  | 1.0 + 0.5   | 0.02 + 0.002  |
|             | 5,000 µF   | 1.0 + 0.5   | 0.02 + 0.002  | 5,0000 µF  | 1.0 + 0.5   | 0.02 + 0.002  |
|             | 50,00 µF   | 1.0 + 0.5   | 0.02 + 0.002  | 50,000 µF  | 1.0 + 0.5   | 0.02 + 0.002  |
|             | 500,0 µF   | 2.0 + 1.0   | 0.02 + 0.002  | 500,00 µF  | 2.0 + 1.0   | 0.02 + 0.002  |

## Reading rates <sup>11)</sup>

| Function            | Setting | Resolution |            | Reading    |            | Measurement rate<br>in readings/s |
|---------------------|---------|------------|------------|------------|------------|-----------------------------------|
|                     |         | R&S®UDS500 | R&S®UDS600 | R&S®UDS500 | R&S®UDS600 |                                   |
| AC voltage          | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 200                               |
| DC voltage          | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 200                               |
| AC current          | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 200                               |
| DC current          | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 200                               |
| Resistance (2-wire) | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 50                                |
| Resistance (4-wire) | slow    | 5½         | 6½         | 200,000    | 2,000,000  | 5                                 |
|                     | medium  | 4½         | 5½         | 20,000     | 200,000    | 10                                |
|                     | fast    | 4½         | 5½         | 20,000     | 200,000    | 25                                |
| Frequency           | slow    | 6          | 7          | 999,999    | 9,999,999  | 1                                 |
|                     | medium  | 5          | 6          | 99,999     | 999,999    | 10                                |
|                     | fast    | 4          | 5          | 9,999      | 99,999     | 100                               |
| Diode               |         | 4½         | 5½         | 20,000     | 200,000    | 10                                |
| Continuity          |         | 4½         | 5½         | 20,000     | 200,000    | 200                               |
| Temperature         |         | 4          | 5          | 999.9      | 99,999     | 10                                |

<sup>12)</sup> 220 000/440 000 counts except in the 750 V and 10 A range.

<sup>13)</sup> AC accuracy in ±(% of reading).

<sup>14)</sup> Specifications are for sinusoidal curves. Input impedance is 1 MΩ parallel < 100 pF.

<sup>15)</sup> AC accuracy in ±(% of reading + % of range).

## Additional specifications of the R&S®UDS500/UDS600

|                          |                            |   |
|--------------------------|----------------------------|---|
| DC voltage               | measuring method           | sigma delta ADC   |
|                          | input resistance           | > 10 GΩ (only in 200 mV and 2 V ranges)<br>10 MΩ (in all ranges)  |
|                          | CMRR                       | 120 dB at $V_{CM} < 500$ V, 1 kΩ between high and low and 5 measurements/s                                |
|                          | SMRR                       | > 60 dB at 50 Hz or 60 Hz $\pm$ 0.1 % and 5 measurements/s  |
|                          | input current              | 60 pA at +25 °C   |
|                          | overload protection        | 1000 V in all ranges  |
| AC voltage               | measuring method           | AC coupled true RMS measurement   |
|                          | input resistance           | 1 MΩ parallel < 100 pF (on all ranges)  |
|                          | crest factor               | max. 10 (0.5 % additional measurement uncertainty)  |
|                          | CMRR                       | > 60 dB, 1 kΩ in the Lo line and frequency < 60 Hz  |
|                          | overload protection        | 750 V (RMS) (in all ranges)   |
|                          | shunt resistor             | 11.01 Ω at 20 mA<br>1.01 Ω at 200 mA<br>10 mΩ at 2 A, 10 A  |
|                          | overload protection        | fuse 10 A, F characteristic, on the front panel<br>fuse 10 A, T characteristic, inside the device         |
| Resistance               | measuring method           | two-wire and four-wire  |
|                          | overload protection        | 1000 V for all ranges   |
| Continuity test          | measuring method           | 1 mA constant current   |
|                          | threshold value            | adjustable in 1 Ω steps   |
|                          | response rate              | 200 measurements/s  |
|                          | overload protection        | 1000 V  |
| Diode test               | measuring method           | 1 mA constant current   |
|                          | threshold value            | adjustable in 10 mV steps   |
|                          | response rate              | 10 measurements/s   |
|                          | overload protection        | 1000 V  |
| Temperature              | measuring method           | resistance measurement with platinum sensor   |
|                          | sensor types               | PT100, PT500, PT1000  |
|                          | connection                 | two-wire and four-wire  |
|                          | overload protection        | 1000 V  |
| Math functions           | statistics                 | min./max./average/standard deviation  |
|                          | relative measurement       | Null key, offset via keyboard   |
|                          | logarithmic function       | dB: reference level via keyboard or Null key<br>dBm: reference impedance 50/75/600 Ω or freely selectable |
| Data logging             | maximum acquisition rate   | 10 sample/s   |
|                          | maximum logging time       | unlimited   |
|                          | memory depth internal      | 512 kbyte   |
|                          | memory depth external      | USB flash drive (max. 4 Gbyte)  |
|                          | number of measuring counts | internal: 50 000<br>external: defined by USB flash drive capacity   |
|                          | rate log                   | minimum: 5 ms (typ.) (in line with measuring function and resolution)<br>maximum: 3600 s                  |
| Data logging (continued) | duration log               | internal: 250 s to 25 000 h<br>external: defined by USB flash drive capacity                              |
|                          | data log                   | main, second, timestamp   |
| Interfaces               |                            | USB 2.0 (TMC and CDC/VCP)   |
|                          |                            | Ethernet 10/100BASE-T<br>IEEE-488/GPIB optional   |
| Programming              |                            | SCPI  |

| Additional specifications    |  |                         |
|------------------------------|--|-------------------------|
|                              | R&S®UDS500   | R&S®UDS600              |
| Remote control               |  |                         |
| Command processing time      | ≤ 30 ms (nom.)   |                         |
| Protection functions         |  |                         |
| Type of protection functions | automatic shutdown if the internal shunt is overloaded |                         |
| Fuse                         | internal 20 A fuse                                     |                         |
| Resolution                   |  |                         |
| Voltage                      | 1 µV   | 0.1 µV                  |
| Current                      | 0.1 µA   | 0.01 µA                 |
| Resistance                   | 1 mΩ   | 0.1 mΩ                  |
| Capacitance                  | 1 pF   | 0.1 pF                  |
| Temperature                  | 0.1 °C   | 0.1 °C                  |
| Limit testing                | PASS/FAIL indication with color coding                 |                         |
| Display                      | 3.5"/QVGA (color)                                      |                         |
| Display resolution           | 5½ digits, 10 updates/s                                | 6½ digits, 10 updates/s |
| Front panel connections      |  |                         |
|                              | 4 mm safety sockets                                    |                         |
| Rear panel connections       |  |                         |
|                              | standard   |                         |

|   |   |   |
|---|---|---|
| <b>General data</b>                     |   |   |
| <b>Environmental conditions</b>         |   |   |
| Operating temperature range             |   | 0°C to +55°C  |
| Storage temperature range               |   | –40°C to +70°C  |
| Humidity                                |   | noncondensing, 5% to 80%  |
| Altitude                                |   | operating altitude, max. 2000 m above sea level   |
| <b>Power rating</b>                     |   |   |
| Mains nominal voltage                   |   | 115 V/230 V (± 10%)   |
| Common mode voltage                     |   | ► CAT II: 300 V AC (RMS)<br>► CAT I: 1000 V DC<br>► 750 V AC (RMS)  |
| Mains frequency                         |   | 50 Hz to 60 Hz  |
| Maximum power consumption               |   | 25 W (meas.)  |
| Rated current                           |   | max. 0.5 A  |
| Mains fuses                             |   | 100 V to 115 V power source, F630H/250 V  |
|   |   | 230 V power source, F400H/250 V   |
| <b>Product conformity</b>               |   |   |
| Electromagnetic compatibility           | EU: in line with Directive 2014/30/EU                                       | applied harmonized standards:<br>► EN61326-1<br>► EN55011 (Class A)   |
|   | Korea   | KC mark   |
| Electrical safety                       | EU: in line with Low Voltage Directive 2014/35/EU                           | applied harmonized standard: EN61010-2  |
|   | USA   | UL 61010-1  |
|   | Canada  | CSA C22.2 No. 61010-1   |
| RoHS                                    | EU: in line with EU Directive 2011/65/EU                                    | applied harmonized standard: EN IEC 63000   |
| <b>Mechanical resistance</b>            |   |   |
| Vibration                               | sinusoidal  | 5 Hz to 55 Hz, 0.3 mm (peak-to-peak) amplitude const.,<br>55 Hz to 150 Hz, 0.5 g const.,<br>in line with EN 60068-2-6 |
|   | random  | 8 Hz to 500 Hz, 1.2 g (RMS), in all three axes,<br>in line with EN 60068-2-64   |
| Shock                                   |   | 10 Hz to 45 Hz, ramp 6 dB/octave,<br>45 Hz to 2000 Hz, max. 40 g<br>in line with MIL-STD-810E                         |
| <b>Mechanical data</b>                  |   |   |
| Dimensions (W × H × D)                  |   | 222 mm × 97 mm × 291 mm<br>(8.74 in × 3.82 in × 11.46 in)   |
| Weight                                  |   | 2.7 kg (5.9 lb)   |
| Rack installation                       |   | ½ 19", 2 HU   |
| <b>Recommended calibration interval</b> | operation 40 h/week over entire range of specified environmental conditions | 1 year  |

# ORDERING INFORMATION

| Designation   | Type         | Order No.    |
|---|--------------|--------------|
| <b>Base unit</b>  |              |              |
| Digital multimeter, 5½  | R&S®UDS500   | 3658.6470.02 |
| Digital multimeter, 5½, with GPIB interface                               | R&S®UDS500-G | 3658.6470.04 |
| Digital multimeter, 6½  | R&S®UDS600   | 3658.6470.03 |
| Digital multimeter, 6½, with GPIB interface                               | R&S®UDS600-G | 3658.6470.05 |
| <b>Accessories</b>  |              |              |
| Silicon test lead, banana to banana, length: 1 m (set of 5, color: blue)  | R&S®HZ10B    | 3594.6301.02 |
| Silicon test lead, banana to banana, length: 1 m (set of 5, color: red)   | R&S®HZ10R    | 3594.3860.02 |
| Silicon test lead, banana to banana, length: 1 m (set of 5, color: black) | R&S®HZ10S    | 3594.3877.02 |
| <b>System components</b>  |              |              |
| 19" rack adapter, 2 HU, for R&S®NGE100B/NGC100/NPA/UDS and R&S®HMC series | R&S®HZC95    | 5800.2054.02 |

Service at Rohde & Schwarz

## YOU'RE IN GREAT HANDS

|                     | SERVICE PLANS                  | ON DEMAND             |
|---------------------|--------------------------------|-----------------------|
| Calibration         | Up to five years <sup>1)</sup> | Pay per calibration   |
| Warranty and repair | Up to five years <sup>1)</sup> | Standard price repair |

<sup>1)</sup> For extended periods, contact your Rohde & Schwarz sales office.

### Instrument management made easy

The R&S®InstrumentManager makes it easy to register and manage your instruments. It lets you schedule calibration dates and book services.

Find out more  
about our service  
portfolio under:





# FROM PRESALES TO SERVICE. AT YOUR DOORSTEP.

The Rohde & Schwarz network in over 70 countries ensures optimum on-site support by highly qualified experts.

User risks are reduced to a minimum at all project stages:

- ▶ Solution finding/purchase
- ▶ Technical startup/application development/integration
- ▶ Training
- ▶ Operation/calibration/repair



**Service at Rohde & Schwarz**  
**You're in great hands**

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

**Rohde & Schwarz**

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

